



SPECIFICATIONS


DSA-42470

TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7 SEGMENT LED (<i>SUPER BRIGHT</i>)
CHARACTER HEIGHT: -----	7" (177.8mm) HR / MIN
VISIBILITY: -----	500 + Ft. (152.4 Meters)
POWER REQUIREMENTS: --	100-240V 50~60Hz (<i>12vdc Switching Power Supply</i>)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	12.25" x 28.25" x 1.35"
WEIGHT: -----	10 lbs.
OPERATING TEMP.: -----	-17° TO 150° F <i>NEW 1 SEC A YEAR ACCURATE (TCXO)</i>
HUMIDITY: -----	0% TO 95% NON-CONDENSING

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY. **World's Most Accurate RTC**




NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE **STANDARD**

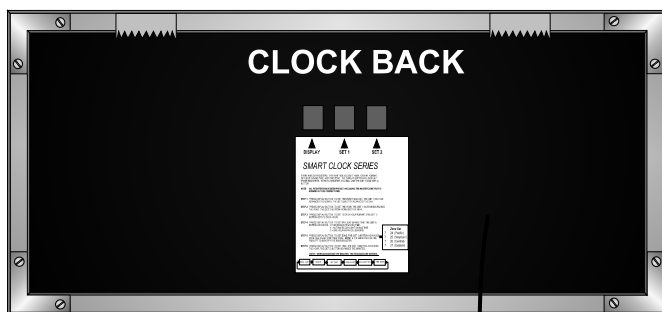


12 OR 24 HOUR FORMAT
NON GLARE LENS
SUPER BRIGHT LEDS
ALUMINUM FRAME

10 YEAR LITHIUM BATTERY BACKUP (*Standard*)
AUTOMATIC DAY LIGHT CORRECTION (*Standard*)
ONE SEC A YEAR ACCURACY (TCXO) (*Standard*)



MOUNTING INSTRUCTIONS

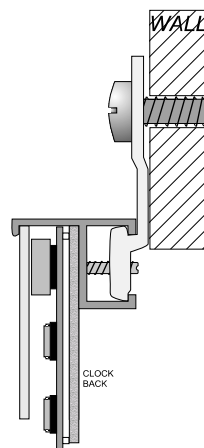

EYELET BRACKET

