



BSA-41218



BSA-41225

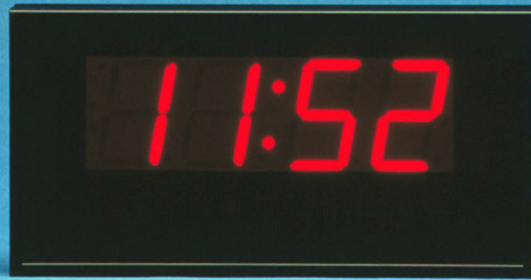


BSA-41240

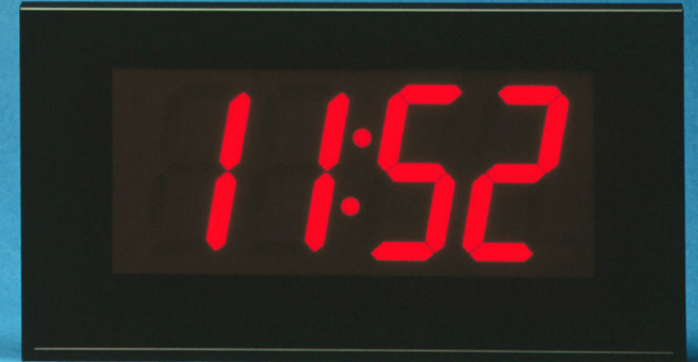

SPECIFICATIONS


TYPE: -----	DIGITAL	
DISPLAY: -----	4-DIGIT, 7 SEGMENT SUPER BRIGHT LED'S	
CHARACTER HEIGHT: -----	1.8" (45.72mm) HR/MIN	BSA-41218
	2.5" (63.5mm) HR/MIN	BSA-41225
	4" (101.6mm) HR/MIN	BSA-41240
VISIBILITY: -----	75 Feet (22.86 METERS)	BSA-41218
	125 Feet (38.1 METERS)	BSA-41225
	200 Feet (60.96 METERS)	BSA-41240
POWER REQUIREMENTS: -----	1.5 A AT 9VAC (TRANSFORMER SUPPLIED).	
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)	
DIMENSIONS: -----	6.25" x 12.25" x 1.375"	BSA-41218
	6.25" x 12.25" x 1.375"	BSA-41225
	8.25" x 15.25" x 1.375"	BSA-41240
WEIGHT: -----	5.25 lbs.	
OPERATING TEMP.: -----	-17° TO 190° F	
HUMIDITY: -----	0% TO 95% NON-CONDENSING	

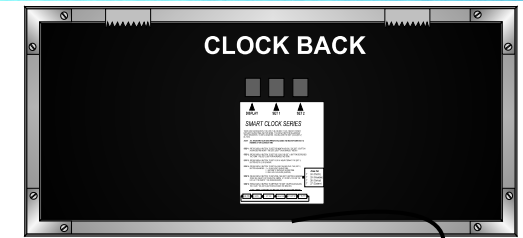

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



MOUNTING INSTRUCTIONS

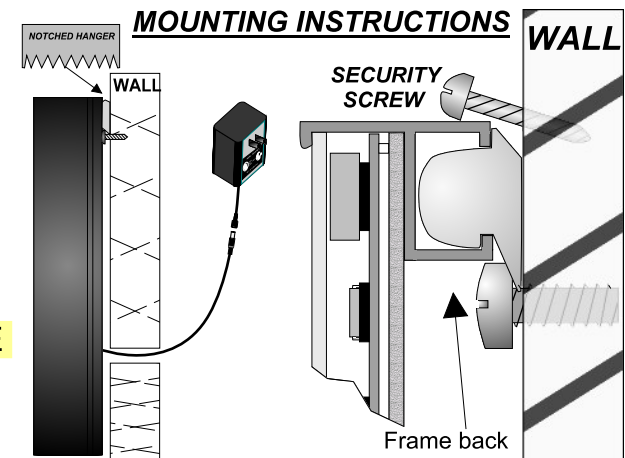

12 OR 24 HOUR FORMAT, NON-GLARE LENS, SUPER BRIGHT LED'S, ALUMINUM FRAME
 10 YEAR LITHIUM BATTERY BACKUP (Standard)
 AUTOMATIC DAY LIGHT CORRECTION (Standard)
 ONE SEC A YEAR ACCURACY (TCXO) (Standard)